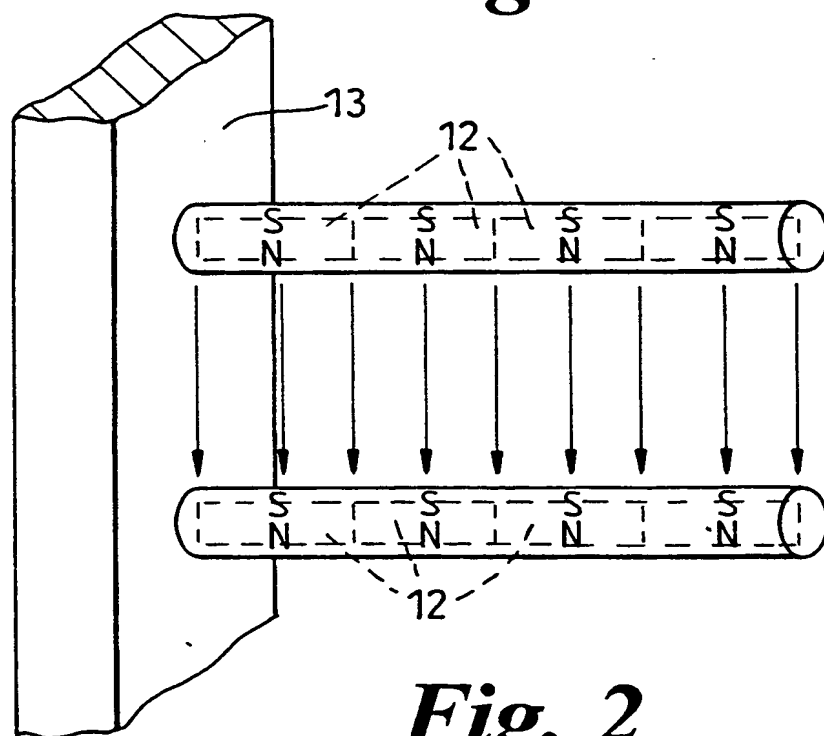
**Fig. 1****Fig. 2**

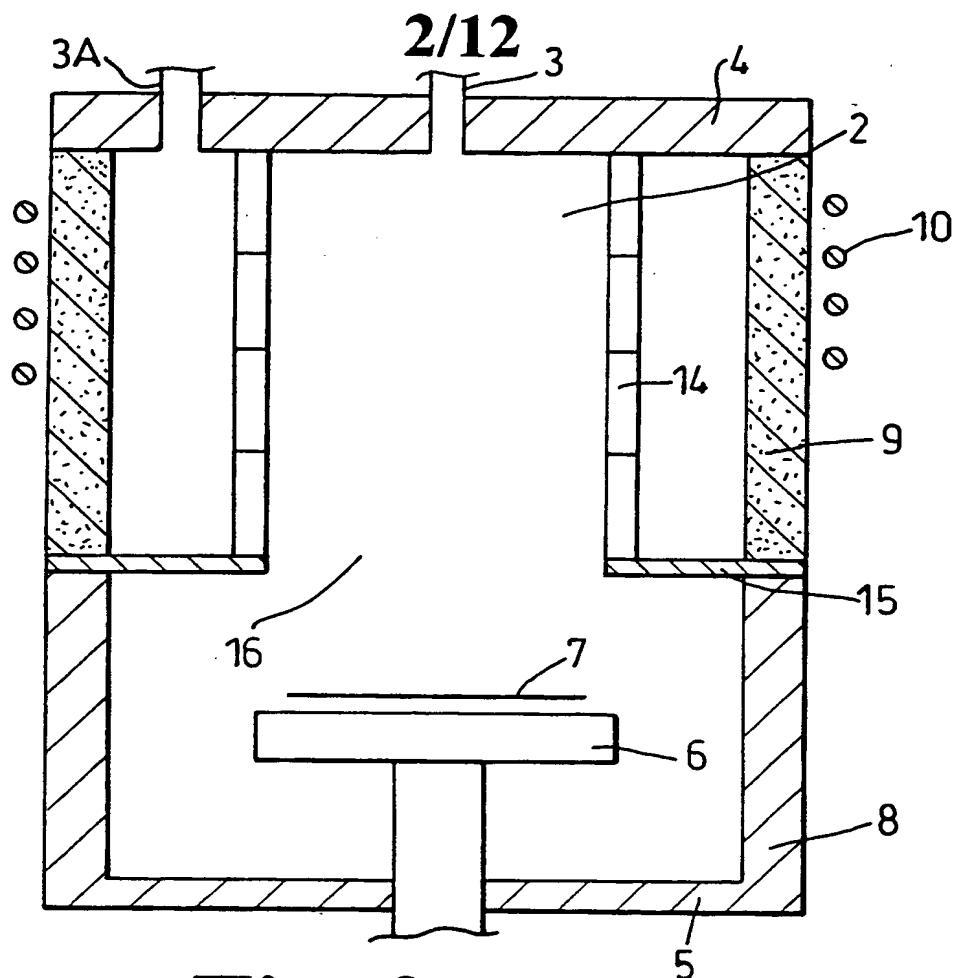


Fig. 3

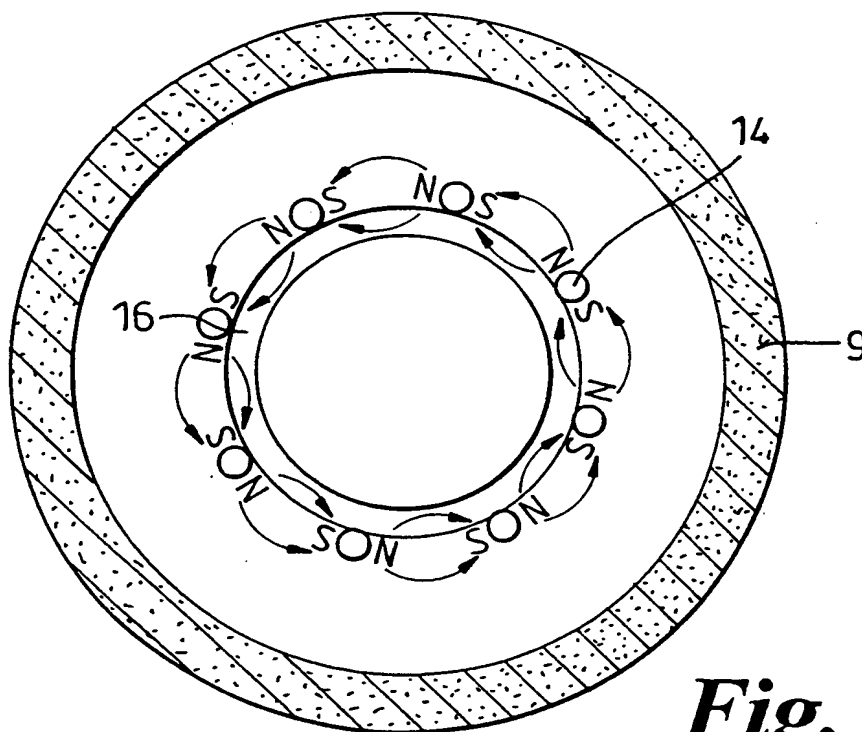
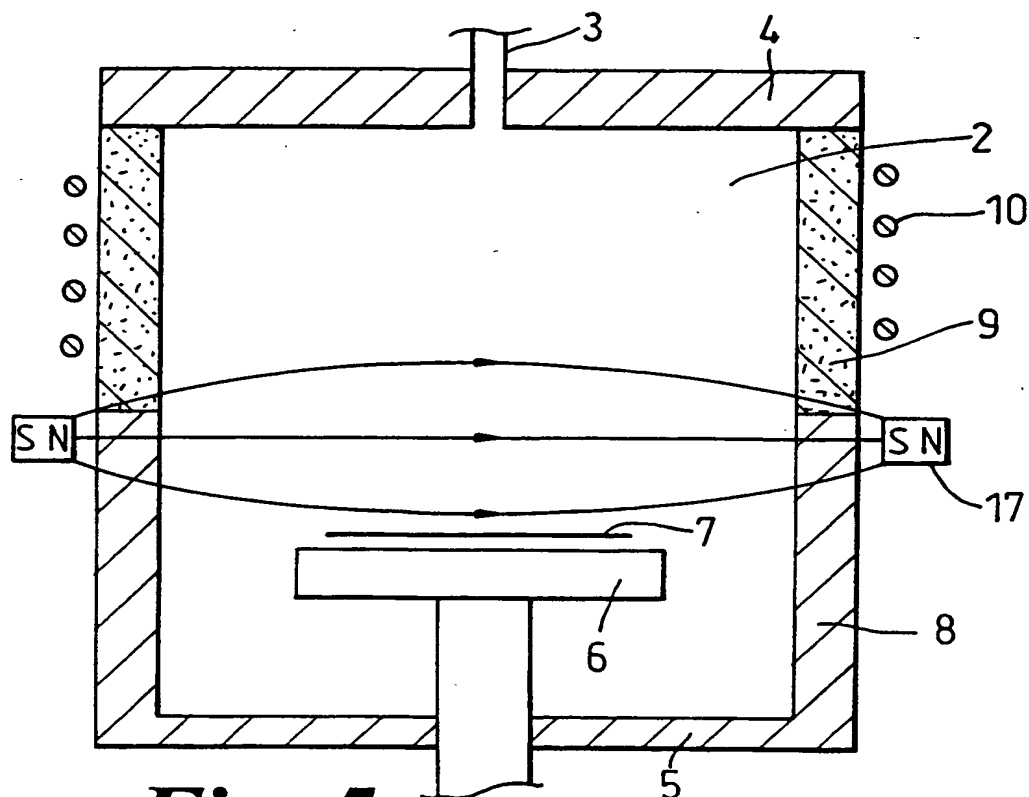
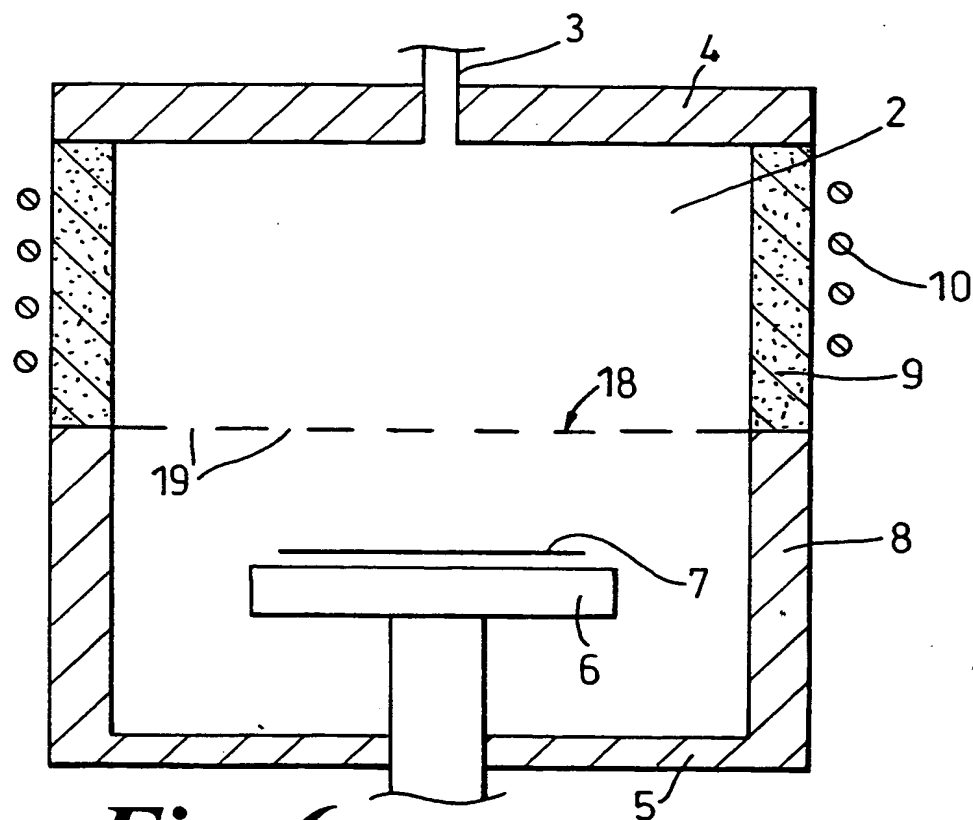
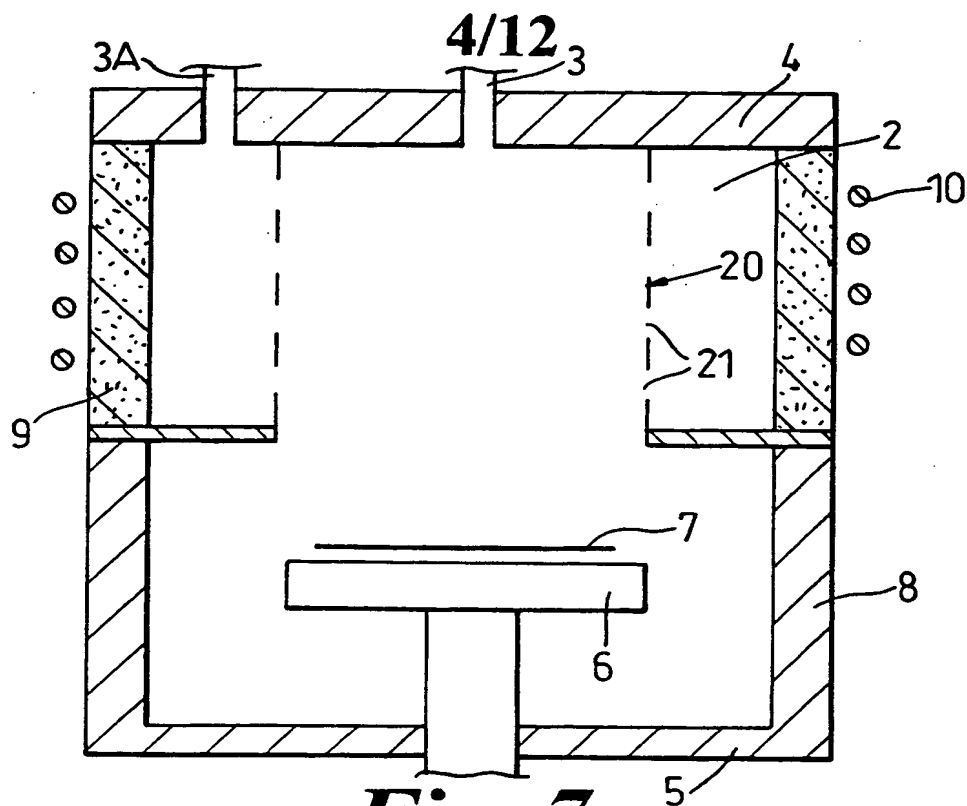
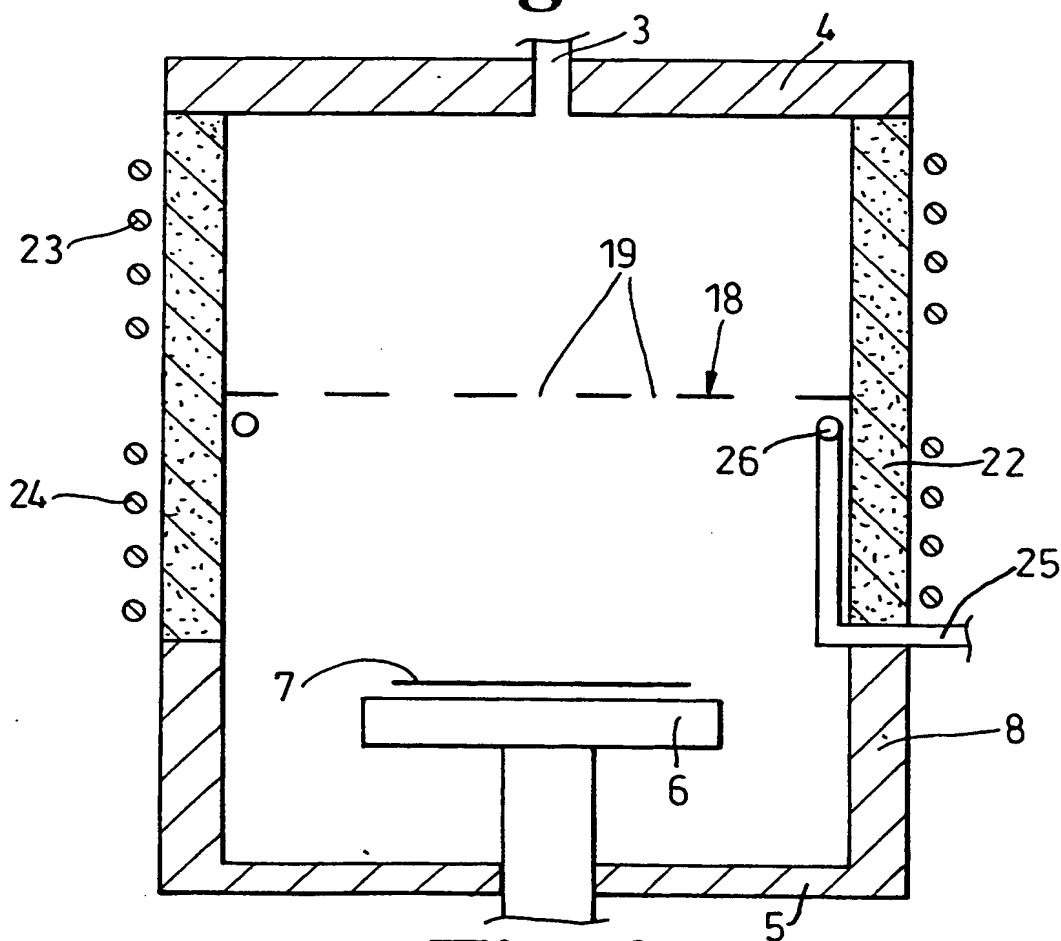


Fig. 4

3/12

**Fig. 5****Fig. 6**

**Fig. 7****Fig. 8**

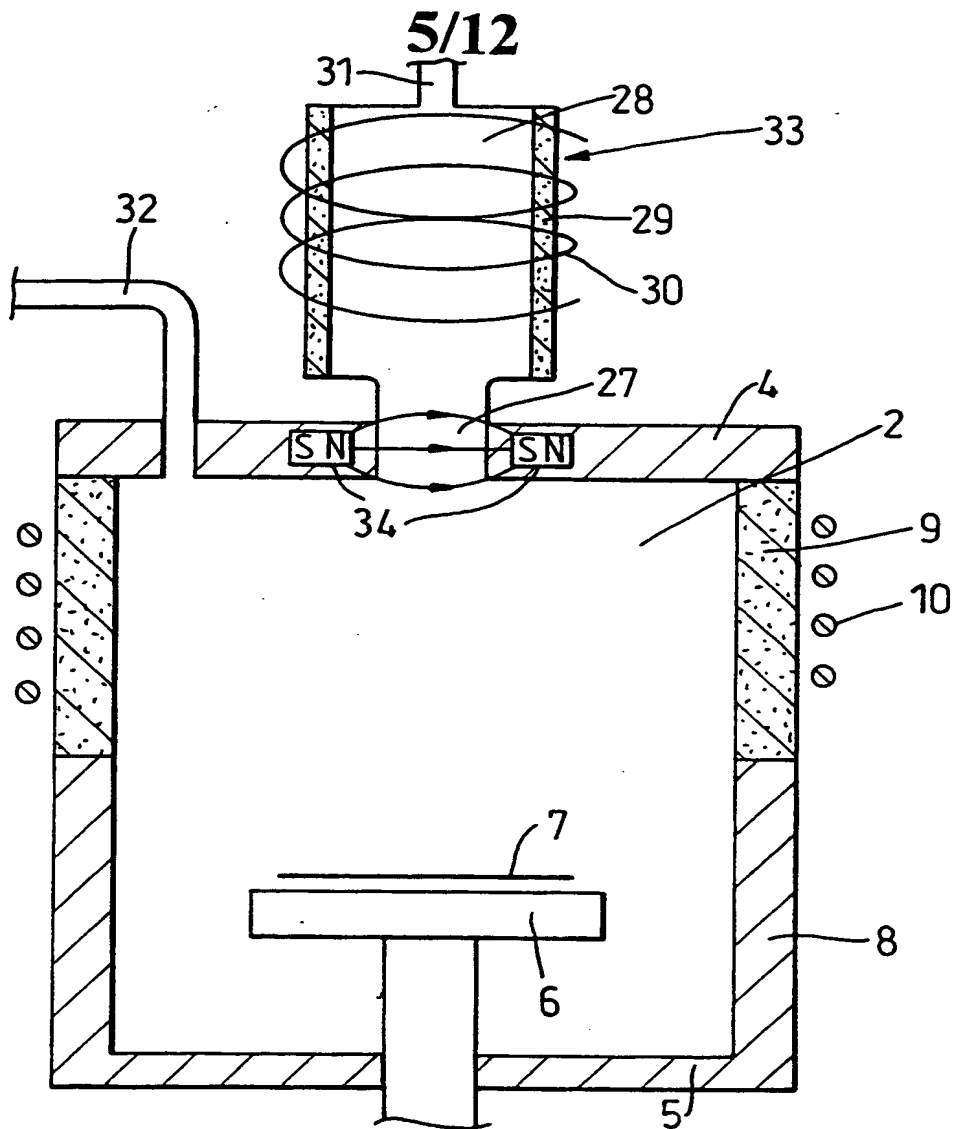


Fig. 9

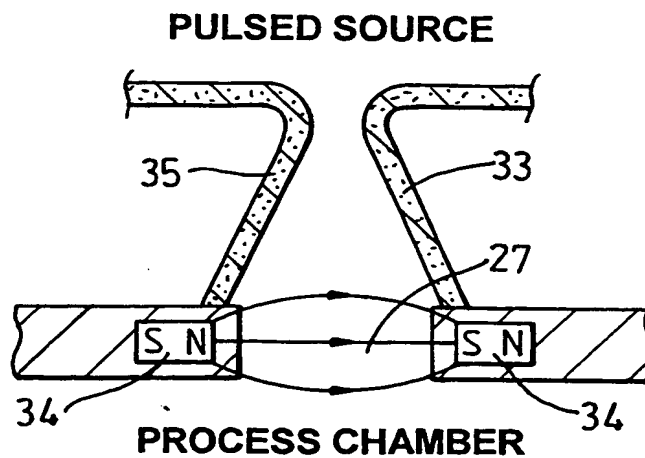


Fig. 10

6/12

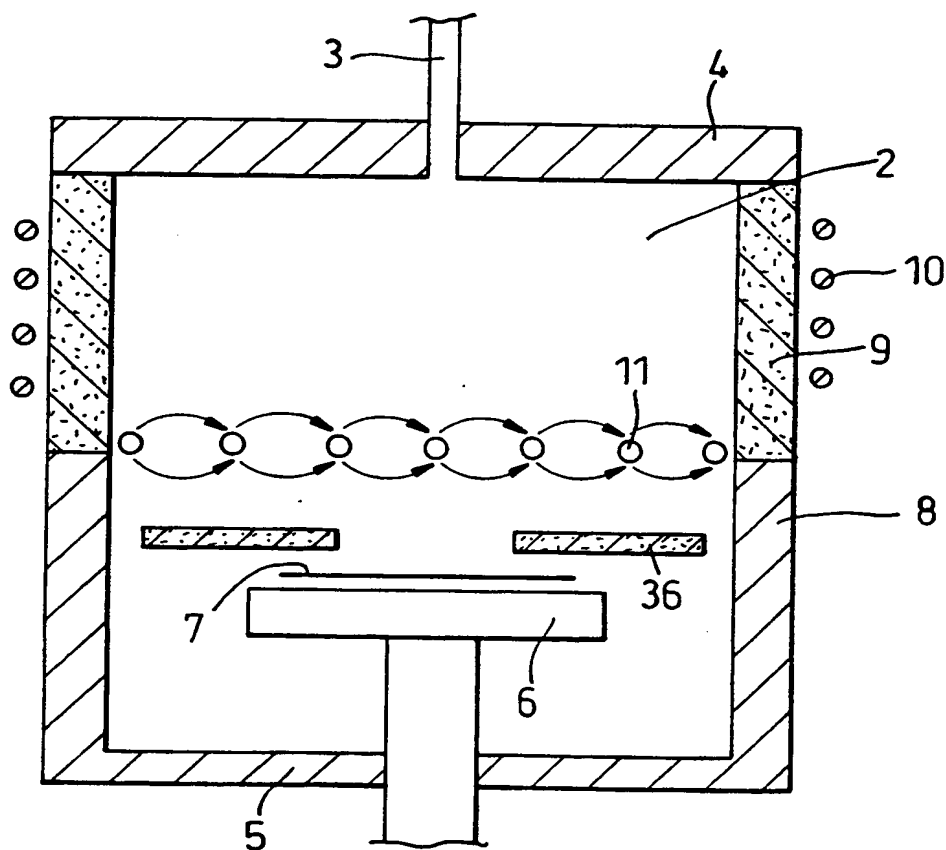
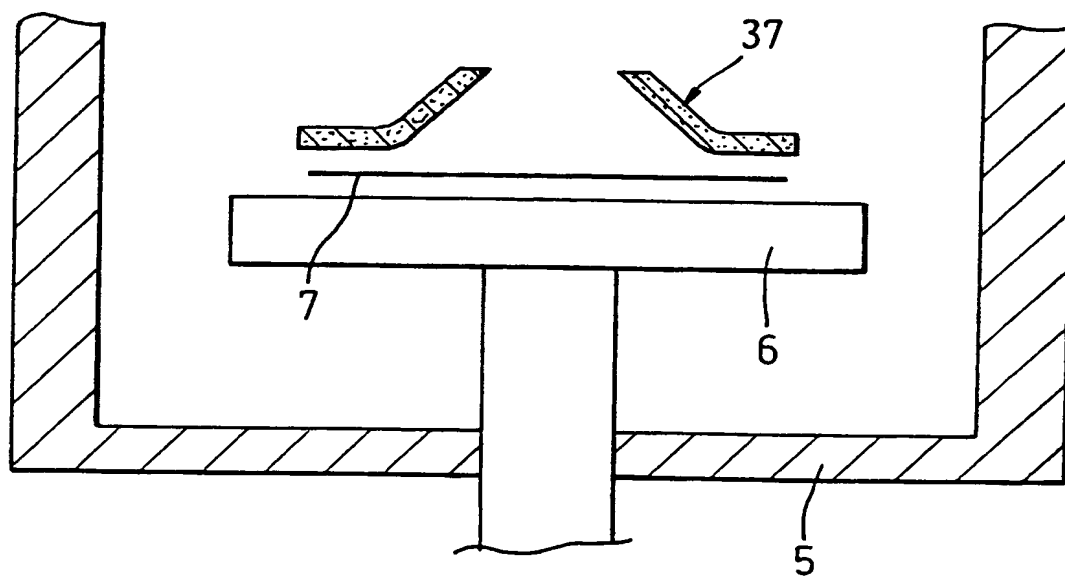
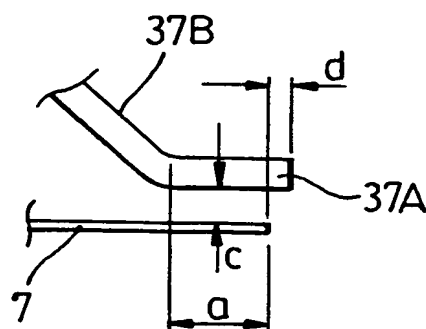
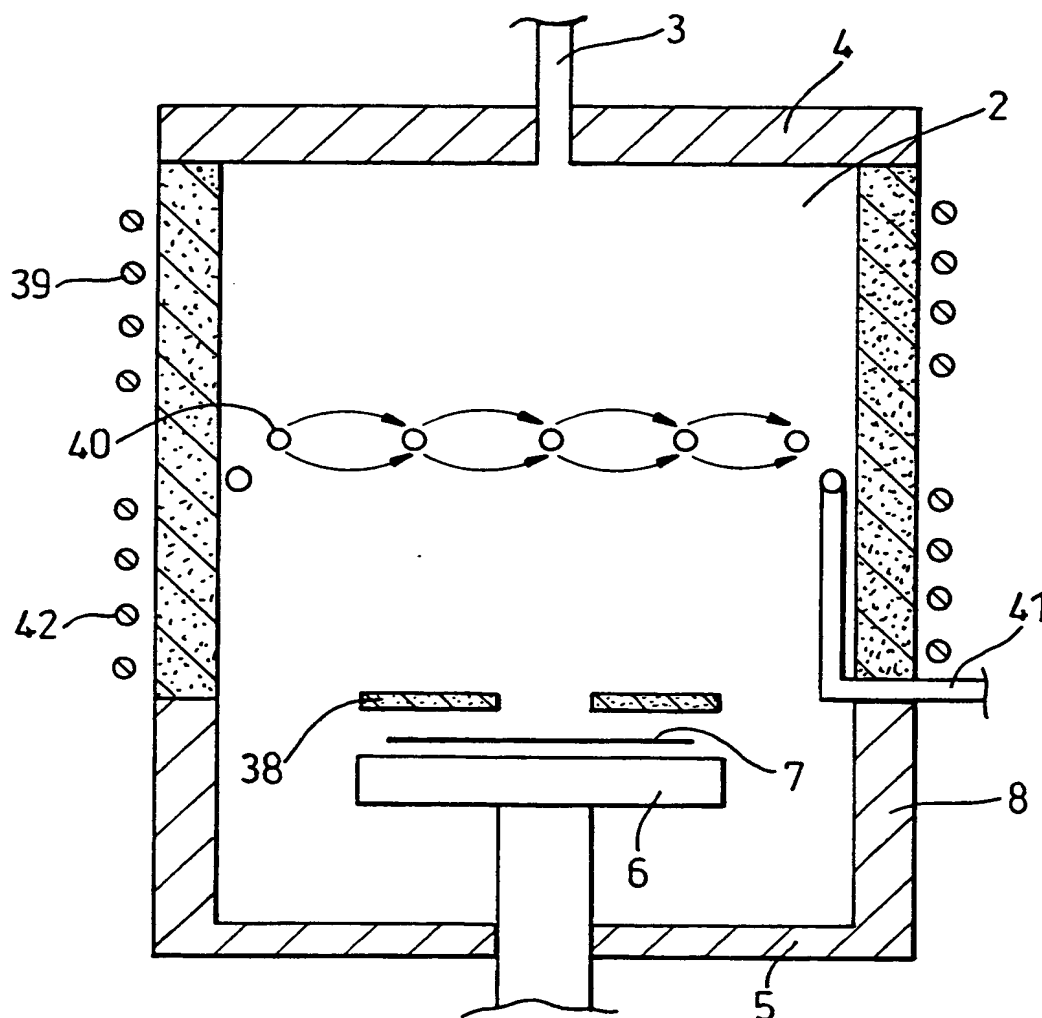


Fig. 11

7/12

*Fig. 12A**Fig. 12B*

8/12

*Fig. 13*

9/12

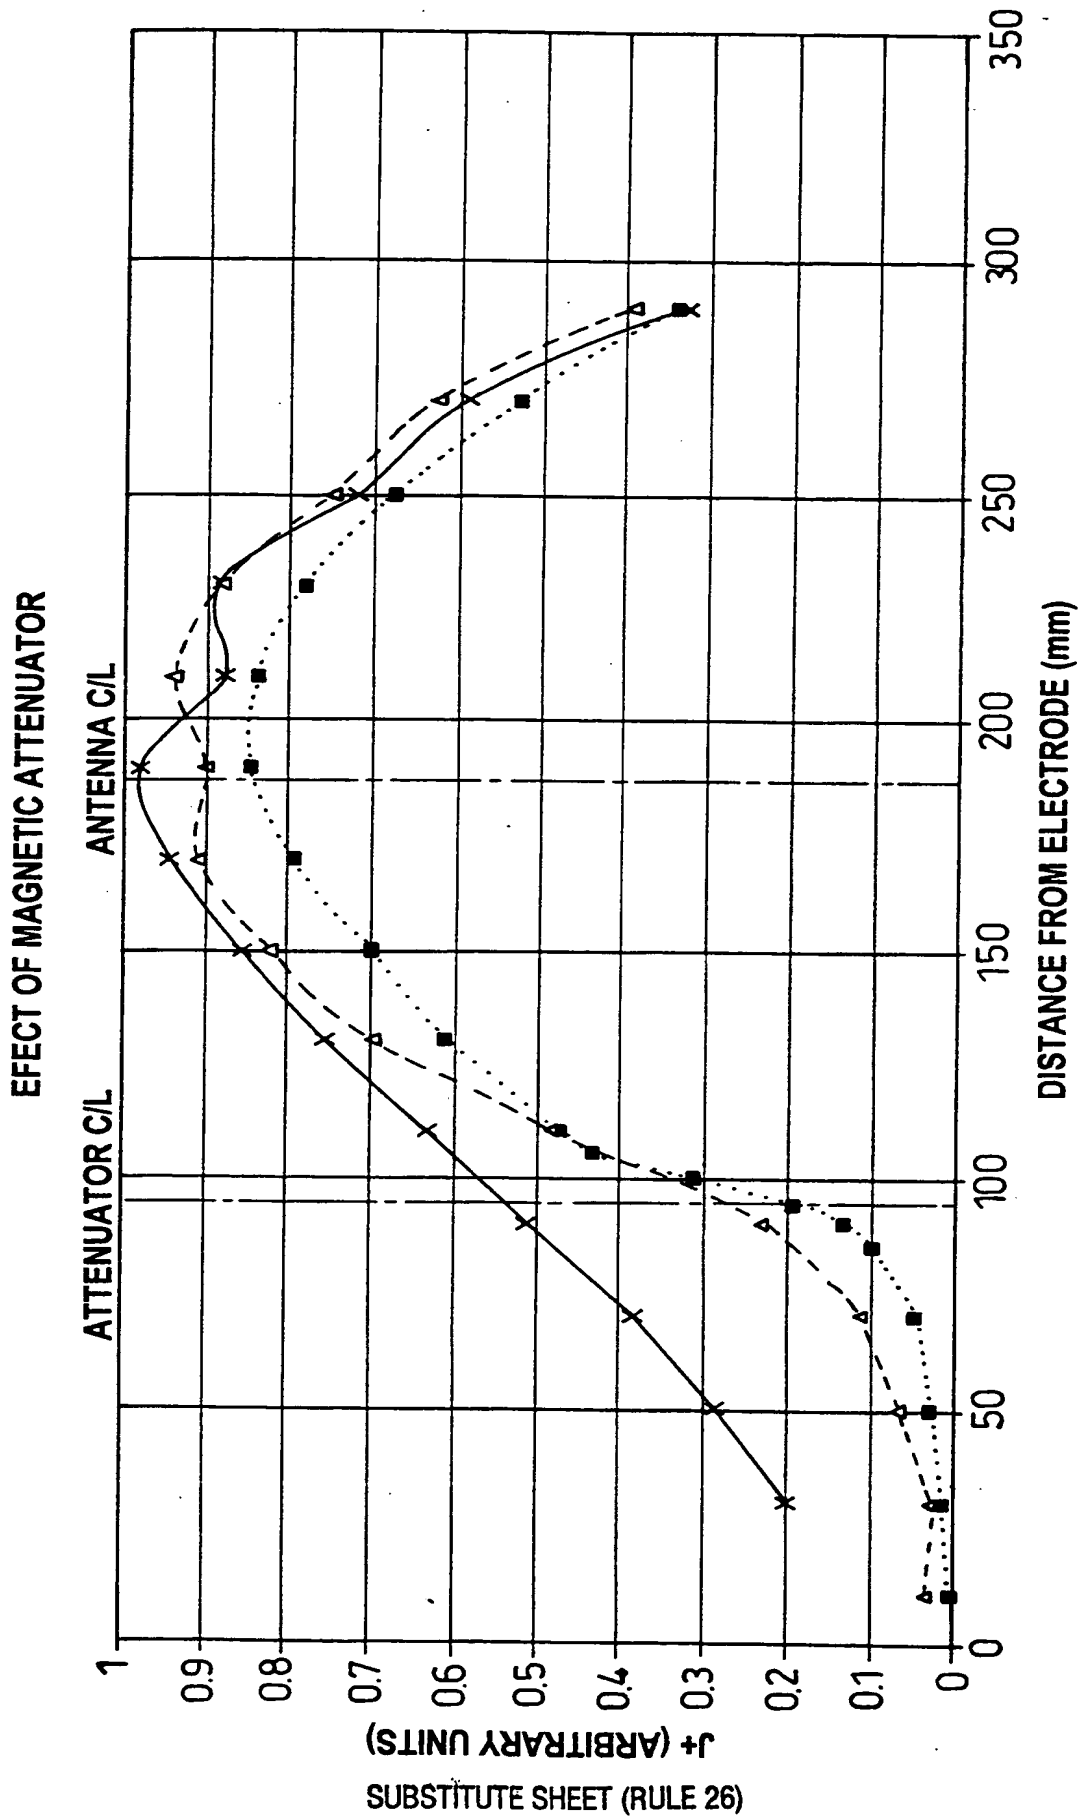



Fig. 14

10/12

MAGNETIC ATTENUATOR

POWER VARIATION 20mT SF6

FIELD STRENGTH 230 GAUSS

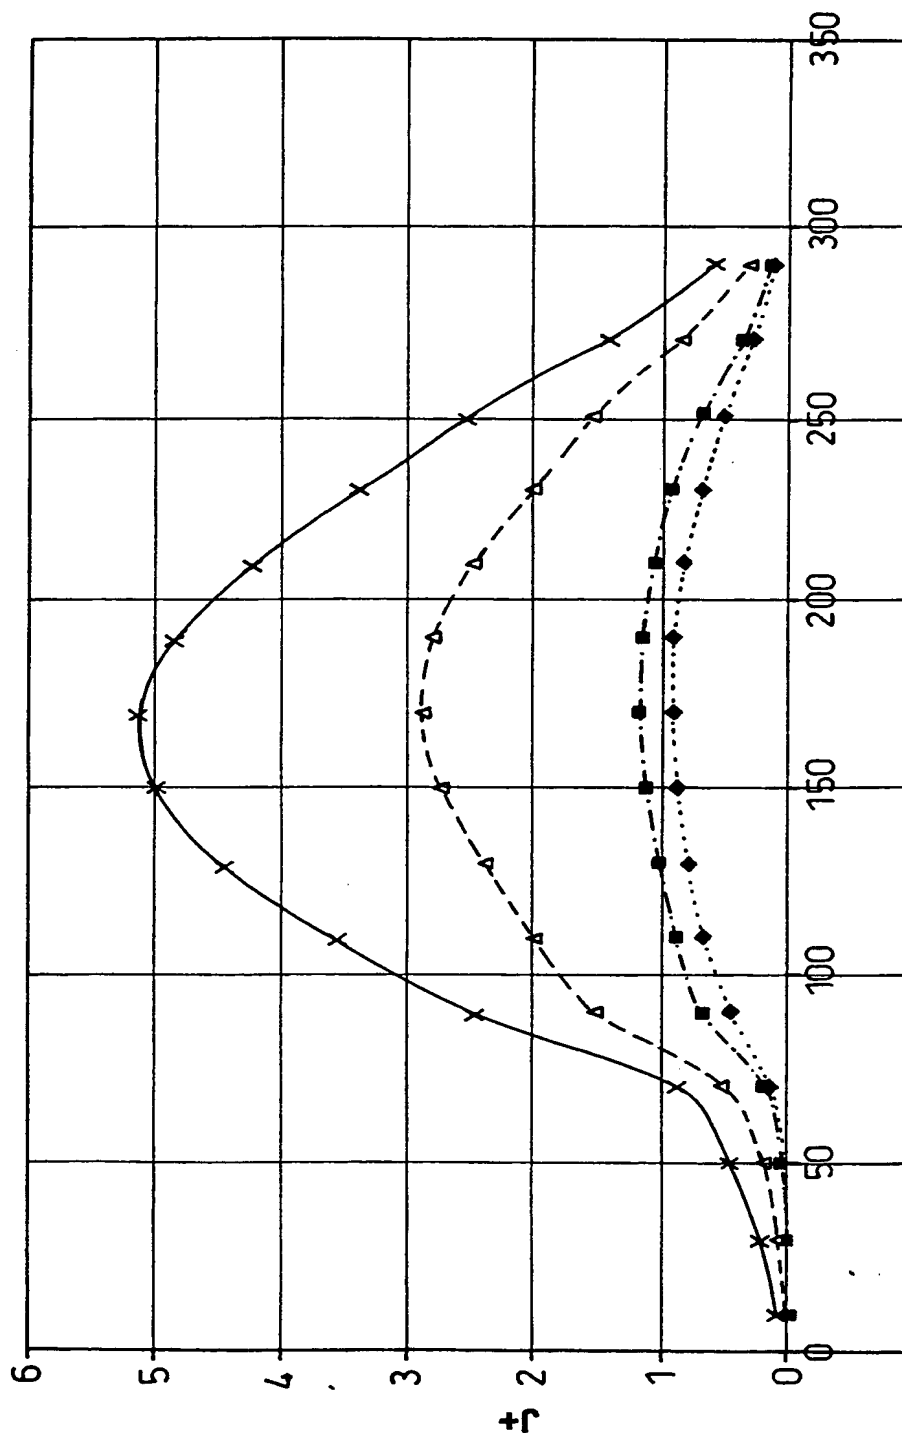

DISTANCE FROM ELECTRODE (mm)

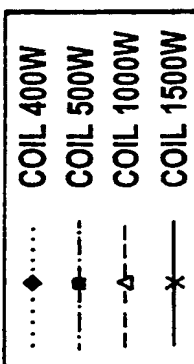
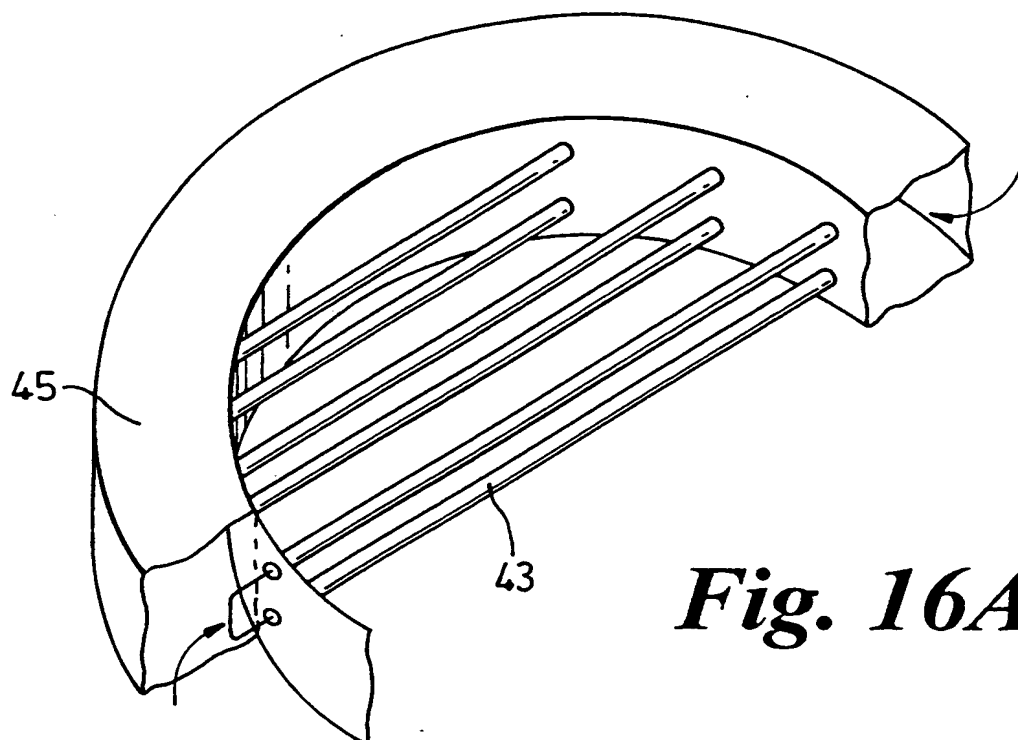
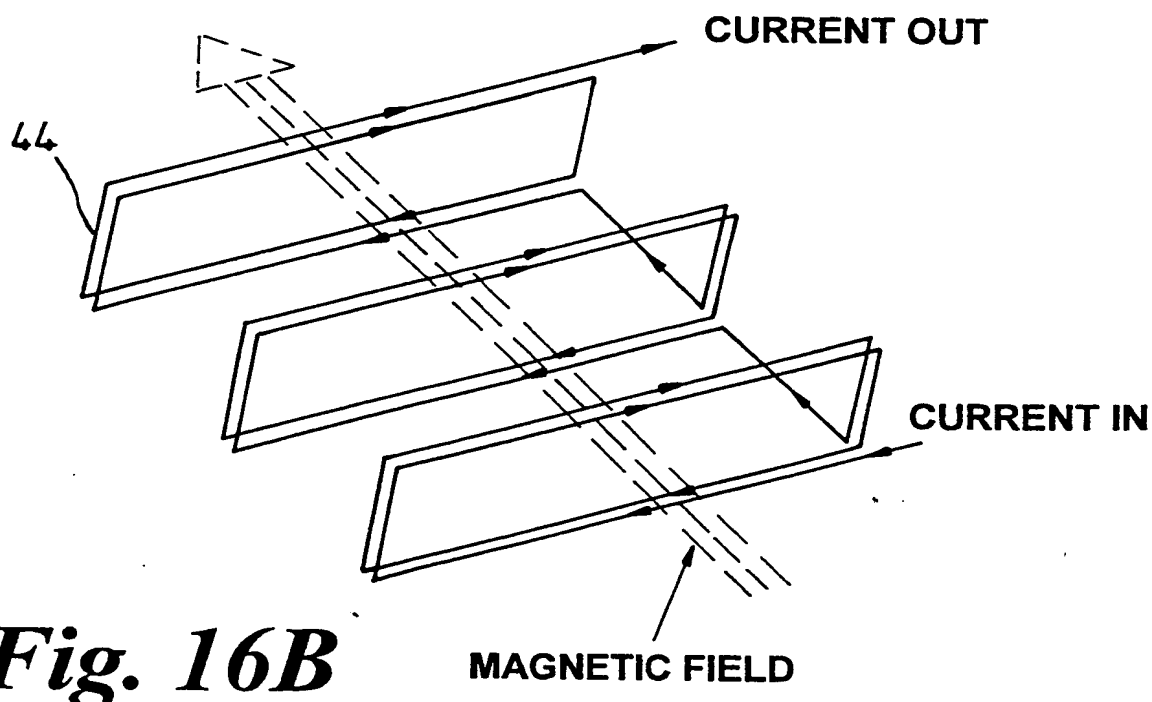


Fig. 15

11/12

**Fig. 16A****Fig. 16B**

12/12

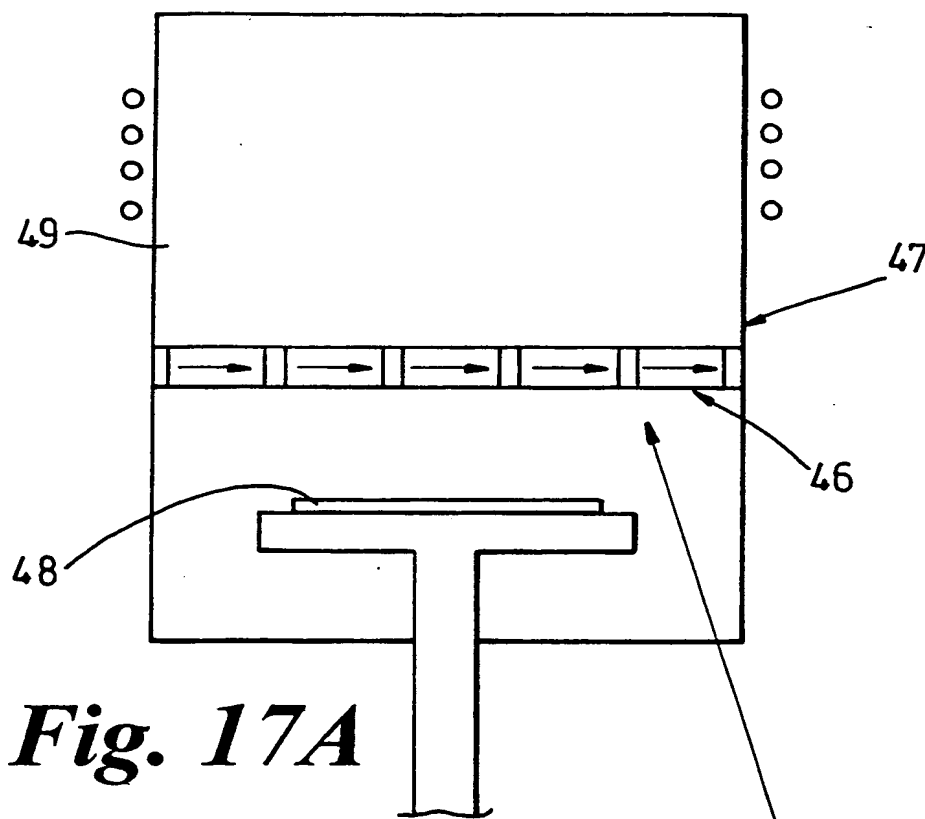


Fig. 17A

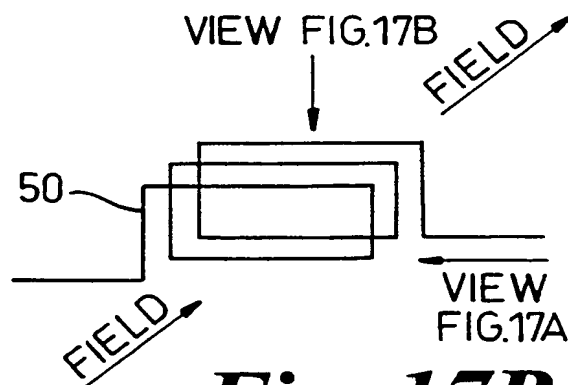


Fig. 17B

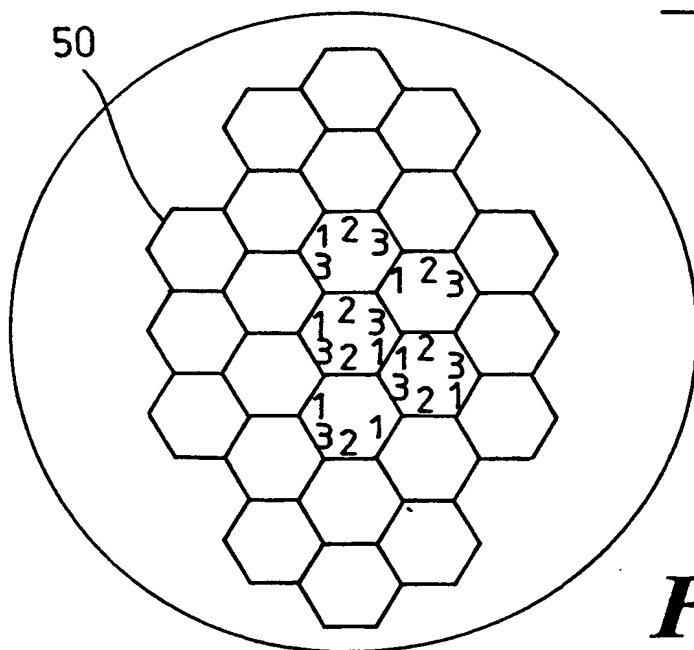


Fig. 17C